


UNIT OF MEASURE in. (mm)	SCALE APPROX. 1" = 1' 25.4mm = 304mm
-----------------------------	--

864761 SHEET 1 OF 2  
MIE 5.7L WITH VELVET DRIVE 5000V V-DRIVE TRANSMISSION

- NOTES:
- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
  - (2) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.

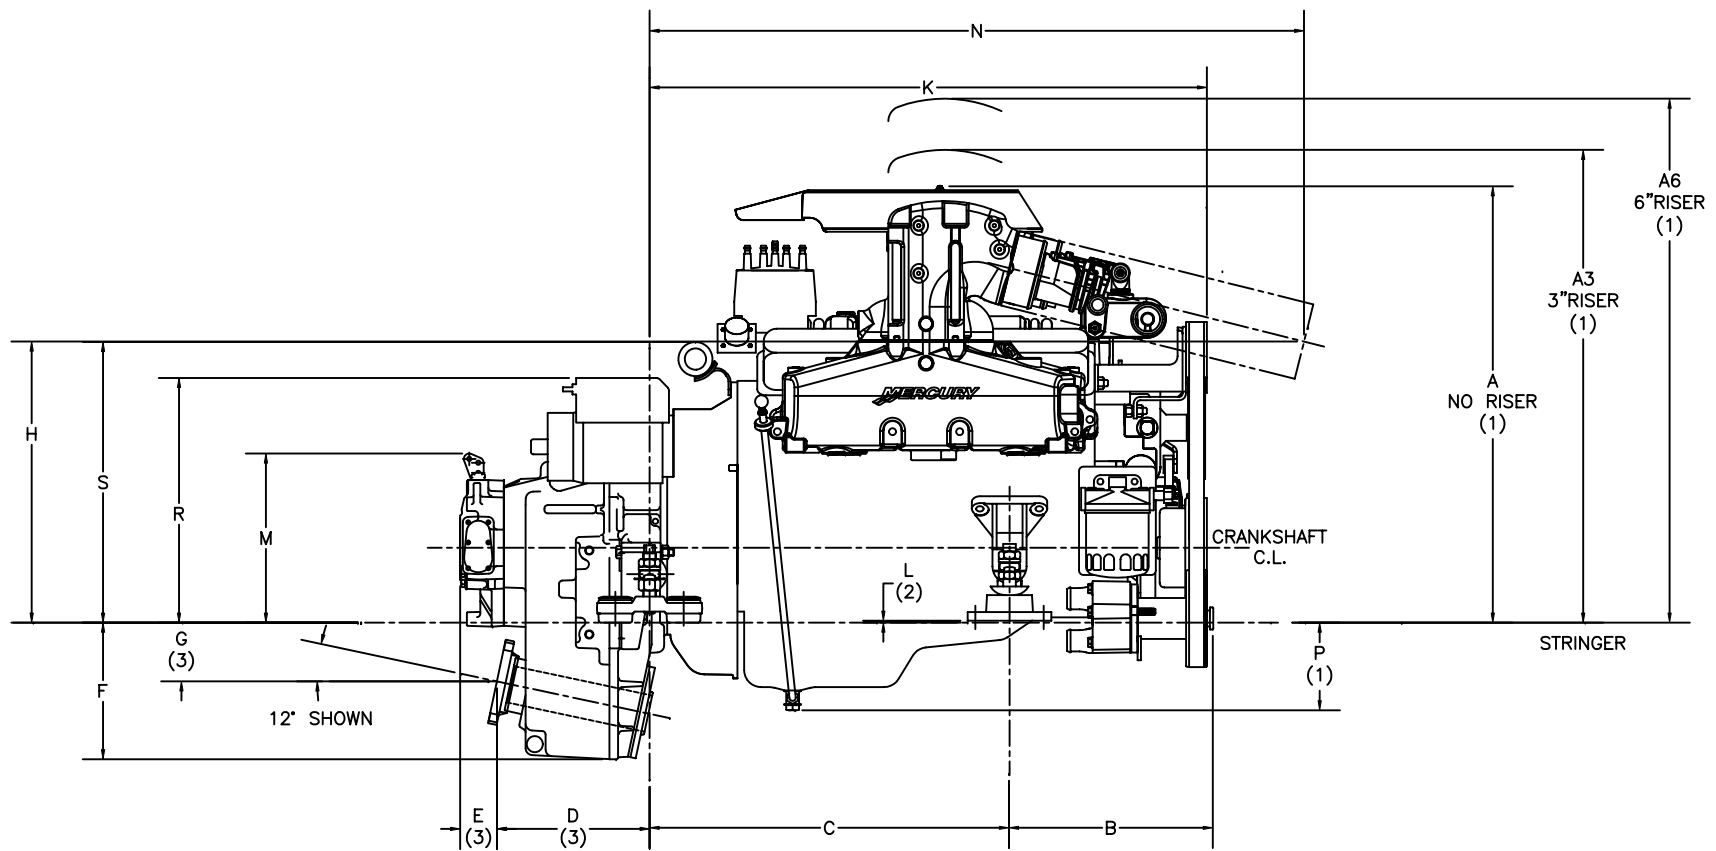

DIMENSIONS	PROPSHAFT ANGLE	
	12°	15°
A	650	631
A3	704	680
A6	780	757
B	303	300
C	535	536
D	227	235
E	55	47
F	204	201
G	88	75
H	418	367
K	830	849
L	3	(-)25
M	252	266
N	975	992
P	131	142
R	30	31
S	35	34

METRIC  
MM.

DIMENSIONS	PROPSHAFT ANGLE	
	12°	15°
A	25-9/16	24-13/16
A3	27-11/16	26-13/16
A6	30-11/16	29-13/16
B	11-15/16	11-13/16
C	21-1/16	21-1/8
D	8-15/16	9-1/4
E	2-3/16	1-13/16
F	8	7-7/8
G	3-7/16	3
H	16-1/2	14-7/16
K	32-11/16	33-7/16
L	1/8	(-)1
M	9-15/16	10-7/16
N	38-3/8	39-1/16
P	5-1/8	5-9/16
R	1-3/16	1-3/16
S	1-3/8	1-3/8

ENGLISH  
IN.

864761 SHEET 2 OF 2  
MIE 5.7L WITH VELVET DRIVE 5000V V-DRIVE TRANSMISSION.

NOTES:

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) BASE OF MOUNT TO BE PARALLEL TO STRINGER. MOUNTS SHOWN AT CENTER OF ADJUSTMENT.
- (3) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.