




 864771 SHEET 1 OF 4 350 MAG MPI/MX 6.2L MPI WITH VELVET DRIVE 72C IN-LINE TRANSMISSION


IOTES:

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) DIMENSIONS TO SEA WATER PUMP INLET.

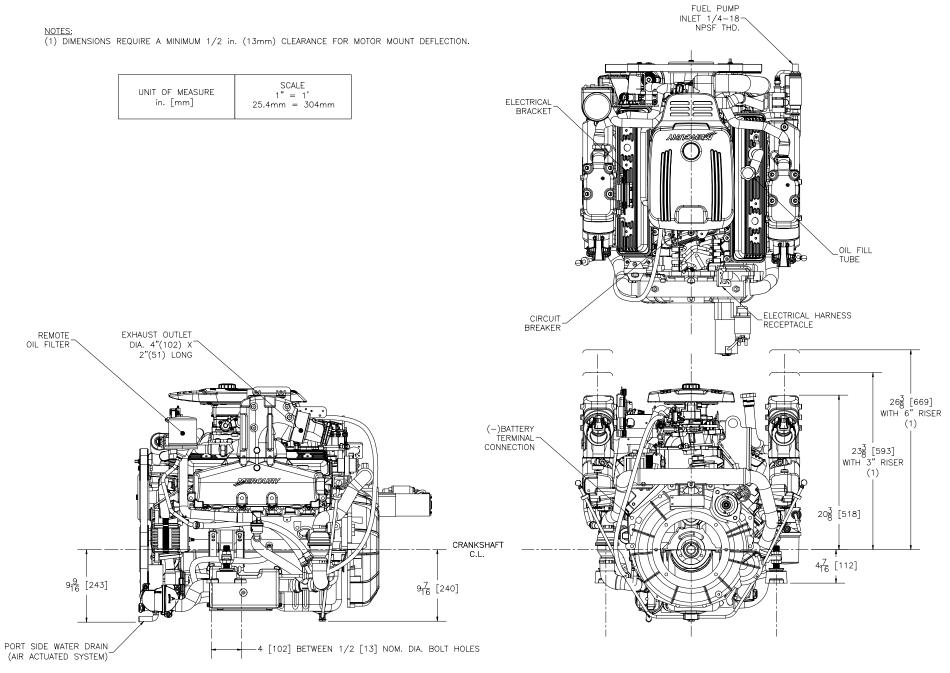

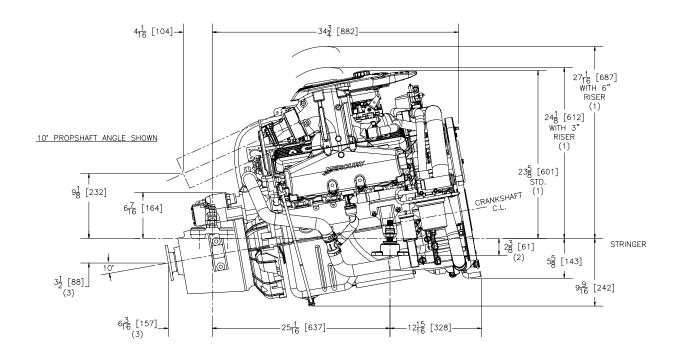

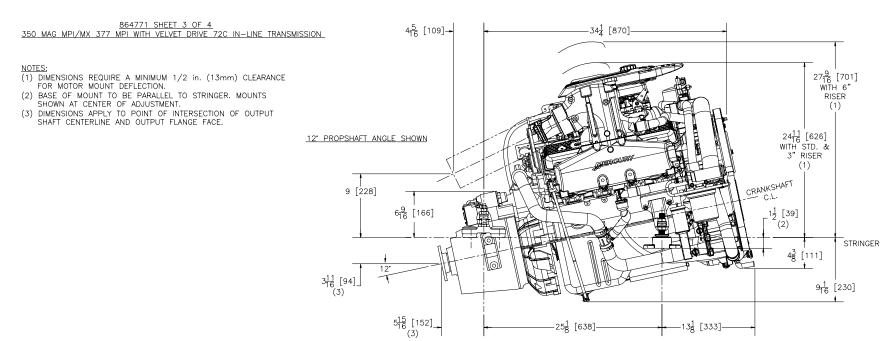

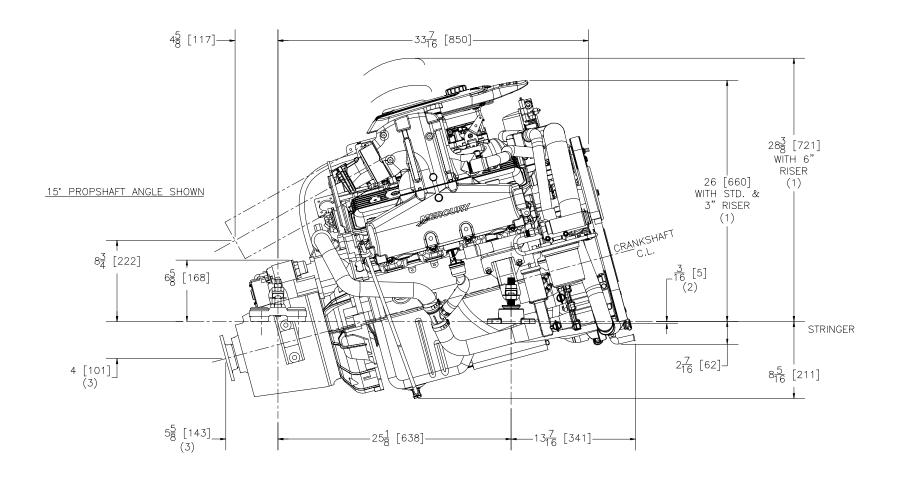

864771 SHEET 4 OF 4
350 MAG MPI/MX 6.2 MPI WITH VELVET DRIVE 72C IN-LINE TRANSMISSION

NOTES:

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) BASE OF MOUNT TO BE PARALLEL TO STRINGER. MOUNTS SHOWN AT CENTER OF ADJUSTMENT.
- (3) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.