


NOTES:

- REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.
- DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- INNER AND OUTER SURFACES OF TRANSOM MUST BE PARALLEL WITHIN 1/8 in. (3 mm) IN AREA COVERED BY TRANSOM PLATES AND REMAIN WITHIN TRANSOM THICKNESS LIMITS.
- REFER TO "TRANSOM CUTOUT" IN THE INSTALLATION MANUAL TO FIND THE CRANKSHAFT CENTERLINE VS. BOAT BOTTOM.

| | | | | |
|--|----------|------------|-----------------------------|--------|
| 8M0058325 | REVISION | UNITS | SCALE | SHEETS |
| 4.3L EC ALPHA/BRAVO FWC CLOSED COOLED/AIR DRAIN | A | mm (in) | 25.4 mm = 305 mm 1" = 1' | 1 of 2 |

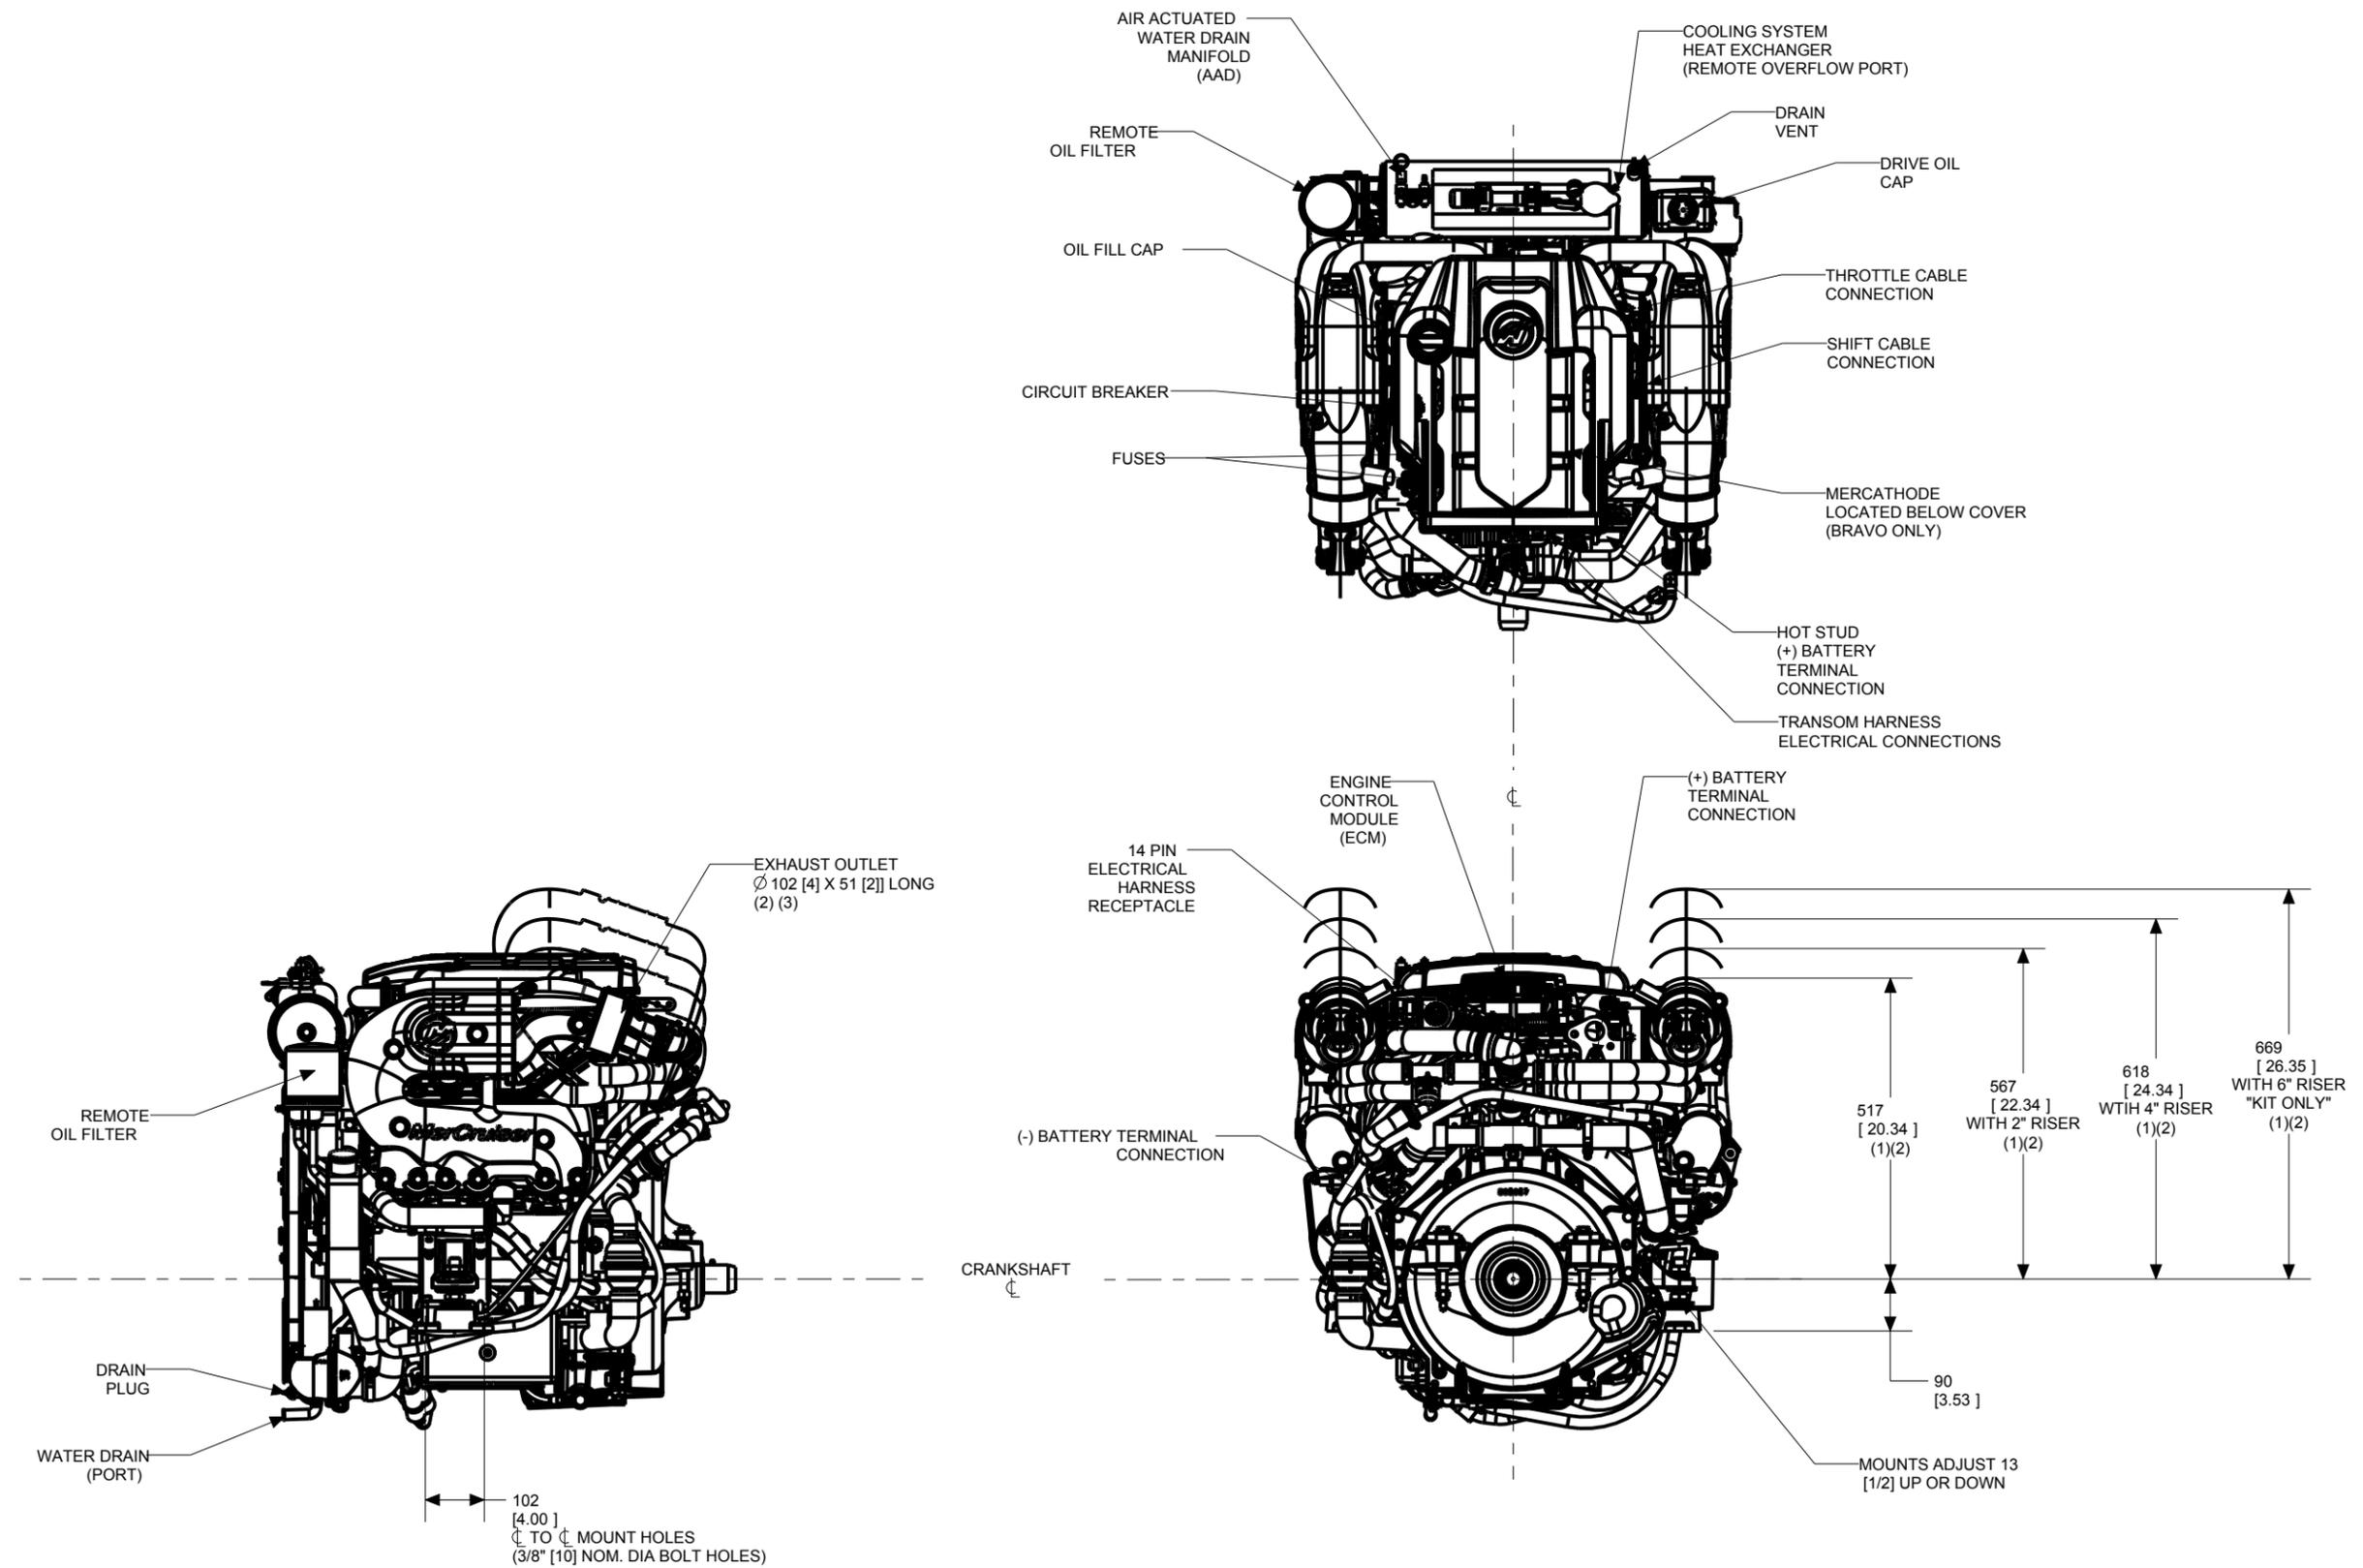

NOTES:
 (1) REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.
 (2) DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
 (3) INNER AND OUTER SURFACES OF TRANSOM MUST BE PARALLEL WITHIN 1/8 in. (3 mm) IN AREA COVERED BY TRANSOM PLATES AND REMAIN WITHIN TRANSOM THICKNESS LIMITS.
 (4) REFER TO "TRANSOM CUTOUT" IN THE INSTALLATION MANUAL TO FIND THE CRANKSHAFT CENTERLINE VS. BOAT BOTTOM.

| | | | | |
|--|----------|------------|-----------------------------|--------|
| 8M0058325 | REVISION | UNITS | SCALE | SHEETS |
| 4.3L EC ALPHA/BRAVO FWC CLOSED COOLED/AIR DRAIN | A | mm (in) | 25.4 mm = 305 mm 1" = 1' | 2 OF 2 |

MERCURY
MerCruiser