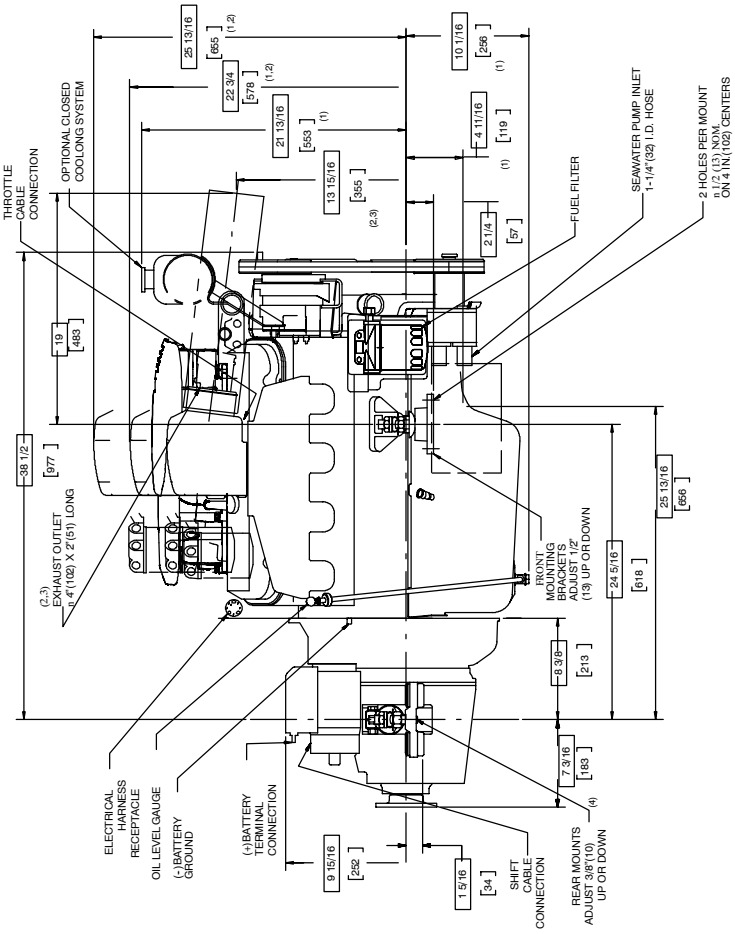

MIE 7.4L MPI BLUEWATER WITH (VELVET DRIVE 72C) REMOTE V-DRIVE TRANSMISSION

NOTES:
(1) Dimensions Require a 1/2 in (13MM) Clearance Due to Engine Mount Deflection.
(2) Select the Appropriate Exhaust Rise-Height to Maintain a Minumum of 13 in. (330mm) Between the Top of the Exhaust Elbow and the Waterline of the Boat at Maximum Rated Load.
(3) Exhaust Outlets Must Be Above Waterline of Boat at Maximum Rated Load, and Exhaust Flappers and Internal Shutters are Required.
(4) Dimensions Apply to Point of Intersection of Output Shaft Centerline and Output Flange Face.

SCALE APPROX.
1" = 1"
25.4 mm = 304 mm

UNIT OF MEASURE
in. (mm)