

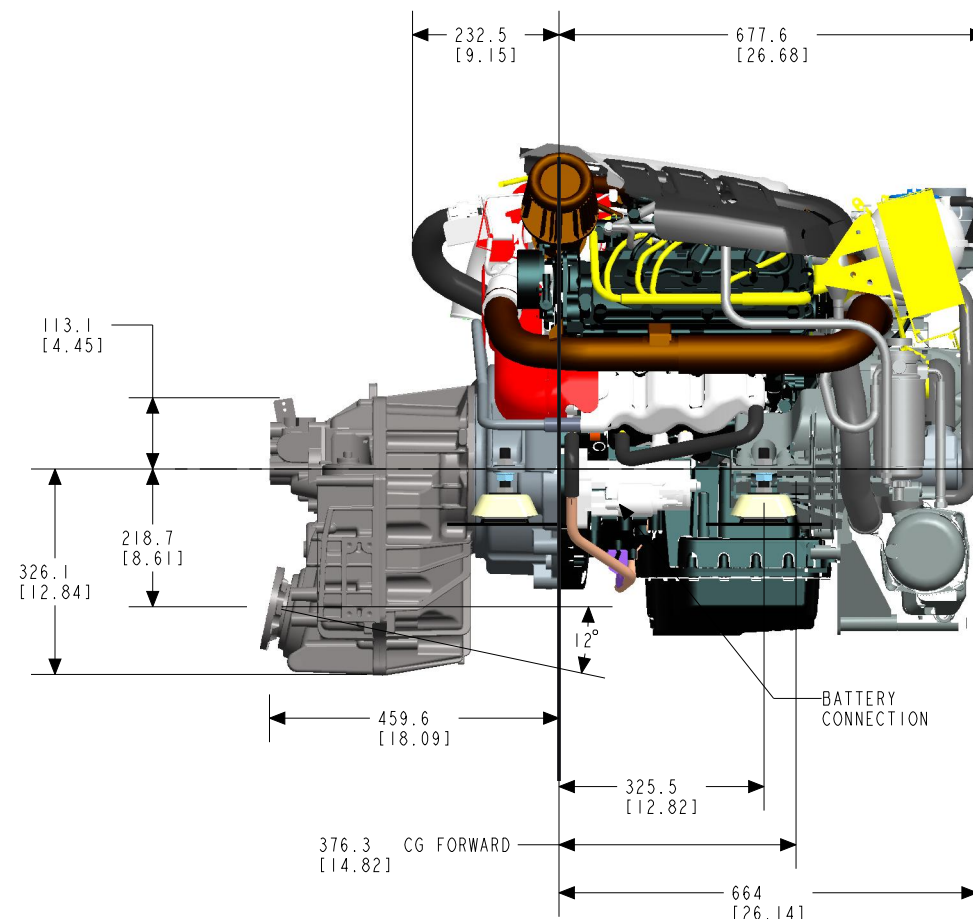
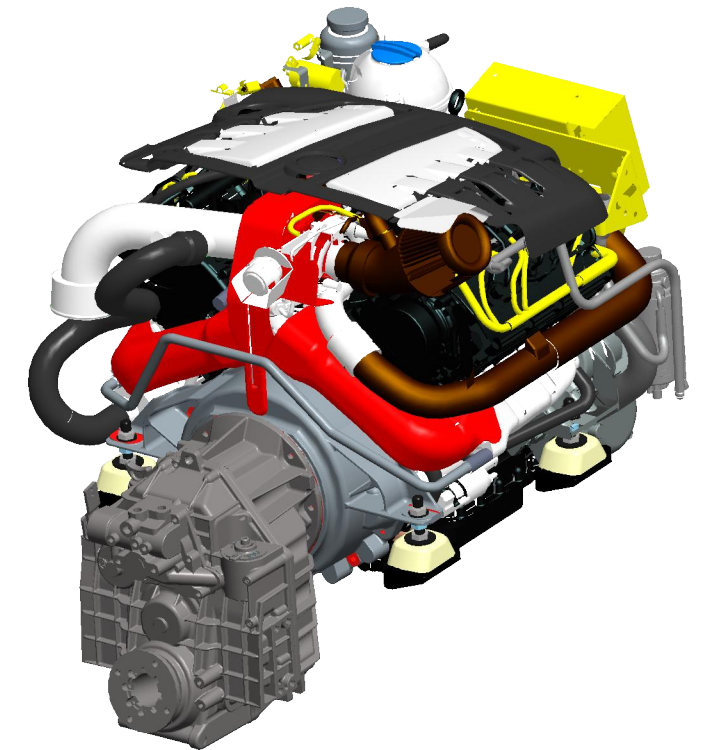


BACK OF BLOCK

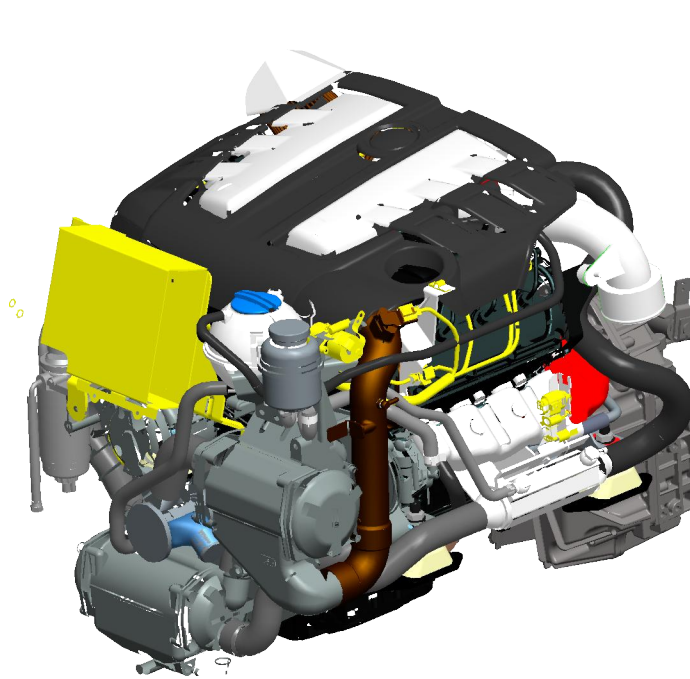

CRANKSHAFT
(3)

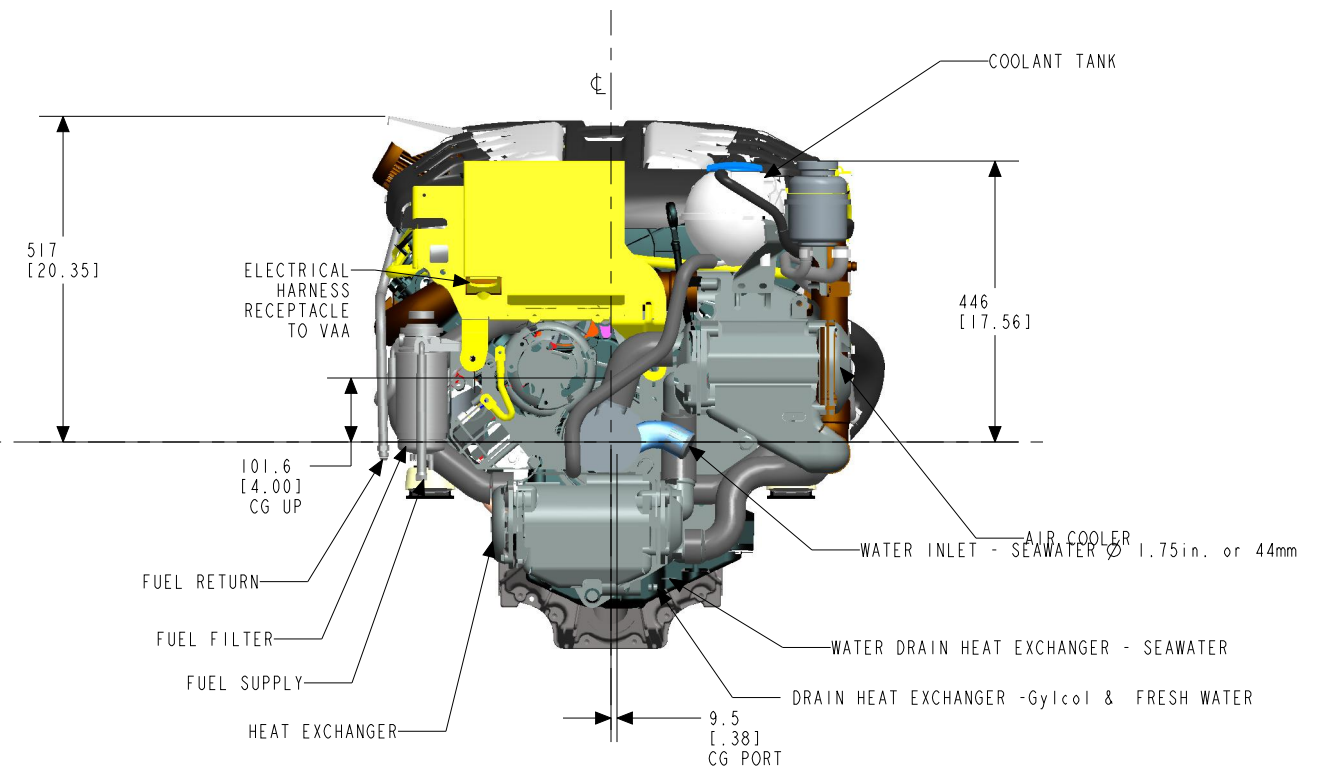

- NOTES:
- (1) REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.
- (2) DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (3) CENTER OF GRAVITY IS FOR ENGINE ONLY WITHOUT DRIVE OR TRANSMISSION.

TDI.P1.V6_63IV



REVISION
A

UNITS
mm
(in)



SCALE
1:12
25.4 mm = 305 mm
1" = 1'

SHEETS
1 OF 2

MERCURY

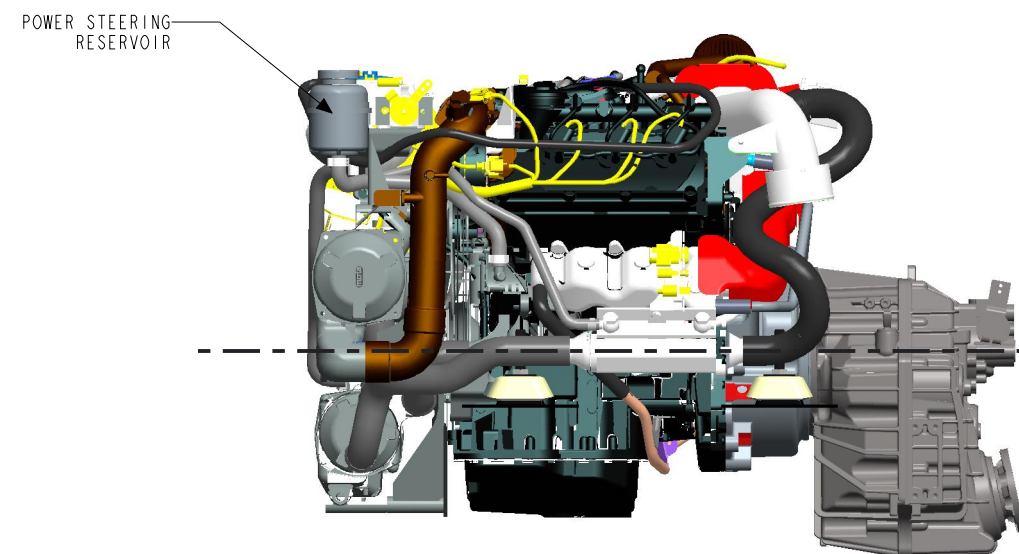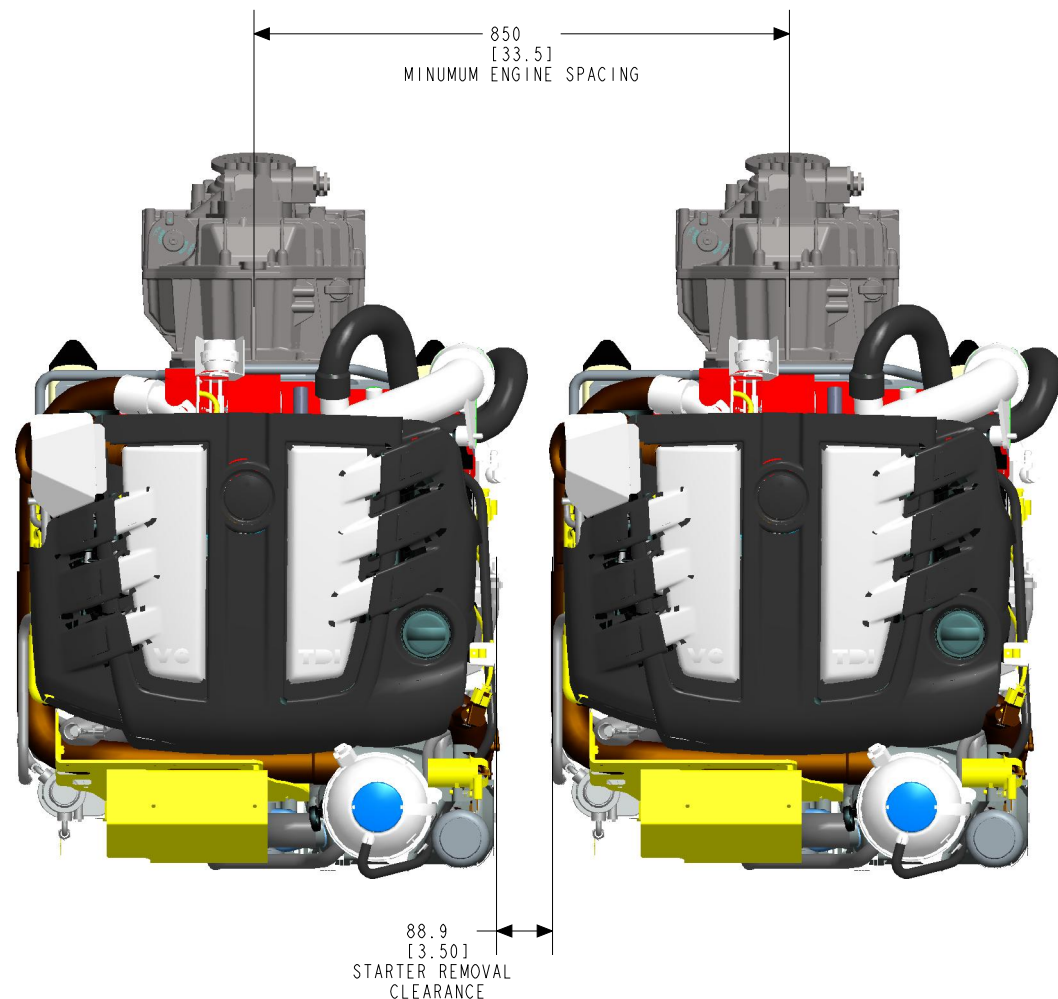

CRANKSHAFT
⌀

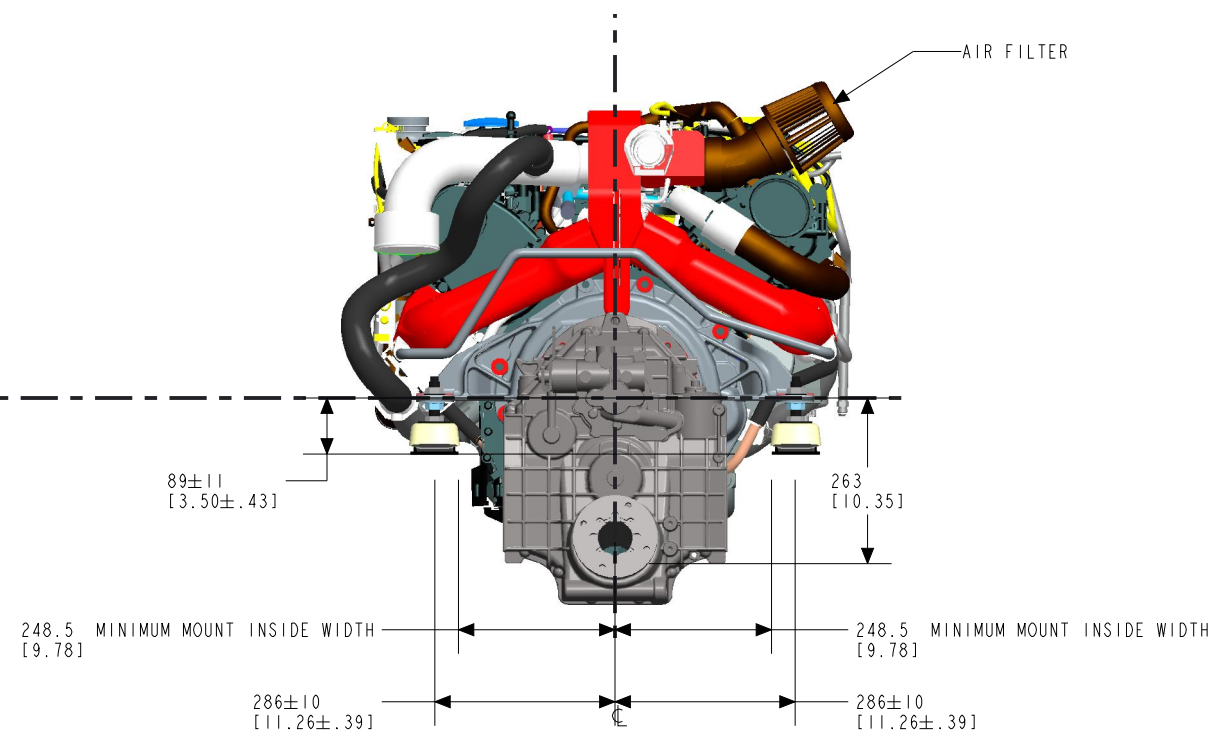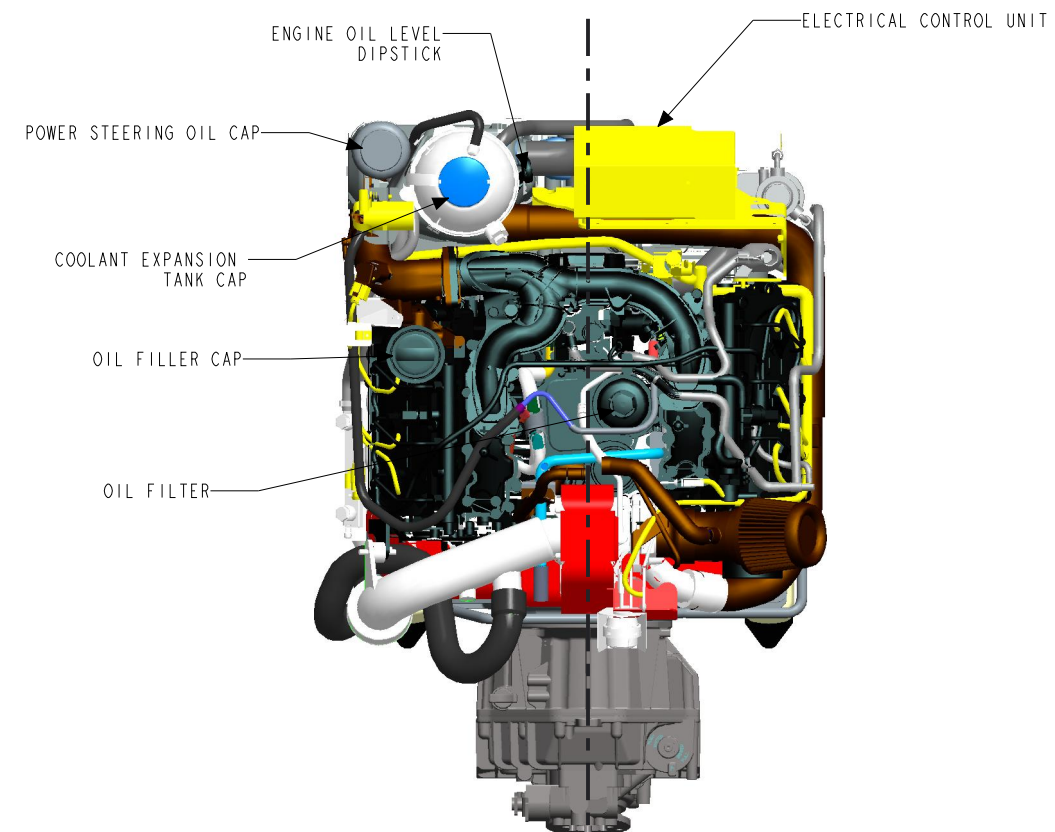

* VIEWS ARE WITH ENGINE COVER REMOVED

NOTES:
(1) REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.
(2) DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
(3) CENTER OF GRAVITY IS FOR ENGIN ONLY WITHOUT DRIVE OR TRANSMISSION.

TDI_P1_V6_63IV

REVISION

A

UNITS

mm
(in)

SCALE

1:12
25.4 mm = 305 mm
1" = 1'

SHEETS

2 OF 2

MERCURY