


OUTPUT FLANGE (SAE NO. 510)

UNIT OF MEASURE	SCALE APPROX.
in. (mm)	1" = 1" 25.4mm = 304mm

864763 SHEET 1 OF 2
 MIE 5.7L WITH ZF/HURTH 630V V-DRIVE TRANSMISSION
 NOTES:
 (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
 (2) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.

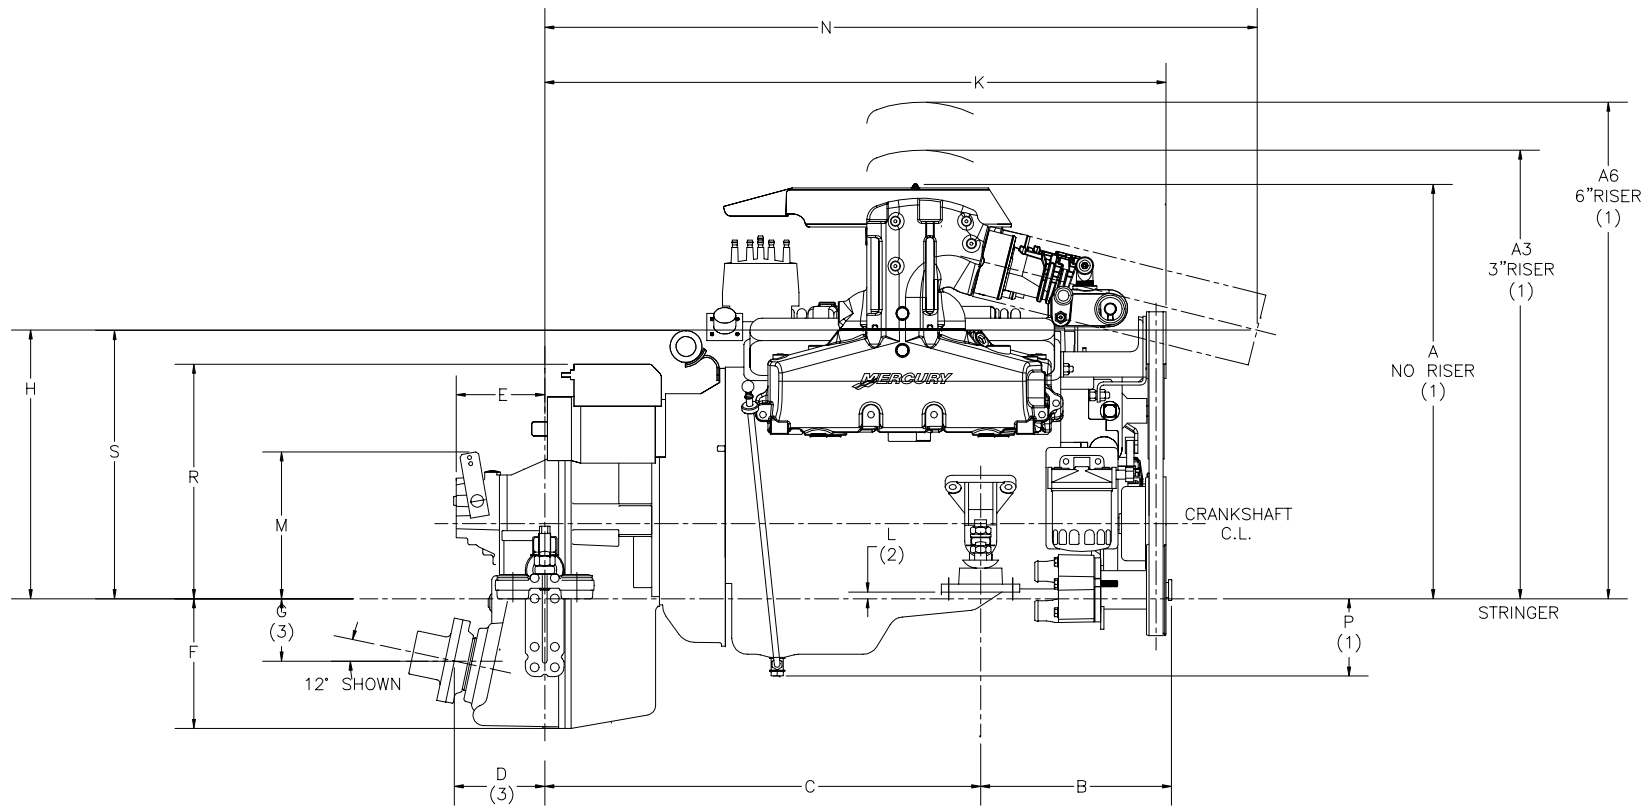

DIMENSIONS	PROPSHAFT ANGLE	
	12°	15°
A STANDARD	657	630
A3 (3" RISER)	712	680
A6 (6" RISER)	788	756
B	303	300
C	692	692
D	143	152
E	141	140
F	206	207
G	99	91
H	426	367
K	986	1006
L	11	26
M	233	238
N	1131	1149
P	123	142
R	372	369
S	426	413

METRIC
MM.

DIMENSIONS	PROPSHAFT ANGLE	
	12°	15°
A STANDARD	25-7/8	24-13/16
A3 (3" RISER)	28	26-3/4
A6 (6" RISER)	31	29-3/4
B	11-15/16	11-13/16
C	27-1/4	27-5/16
D	5-5/8	5-15/16
E	5-9/16	5-1/2
F	8-1/8	8-3/16
G	3-7/8	3-5/8
H	16-3/4	14-7/16
K	38-13/16	39-5/8
L	7/16	1
M	9-3/16	9-3/8
N	44-1/2	45-1/4
P	4-13/16	5-9/16
R	14-5/8	14-9/16
S	16-3/4	16-1/4

ENGLISH
IN.

864763 SHEET 2 OF 2
MIE 5.7L WITH ZF/HURTH 630V V-DRIVE TRANSMISSION.

NOTES:

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) BASE OF MOUNT TO BE PARALLEL TO STRINGER. MOUNTS SHOWN AT CENTER OF ADJUSTMENT.
- (3) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.