


MIE 6.2L MPI WITH VELVET DRIVE 720C IN-LINE TRANSMISSION

90-862939C

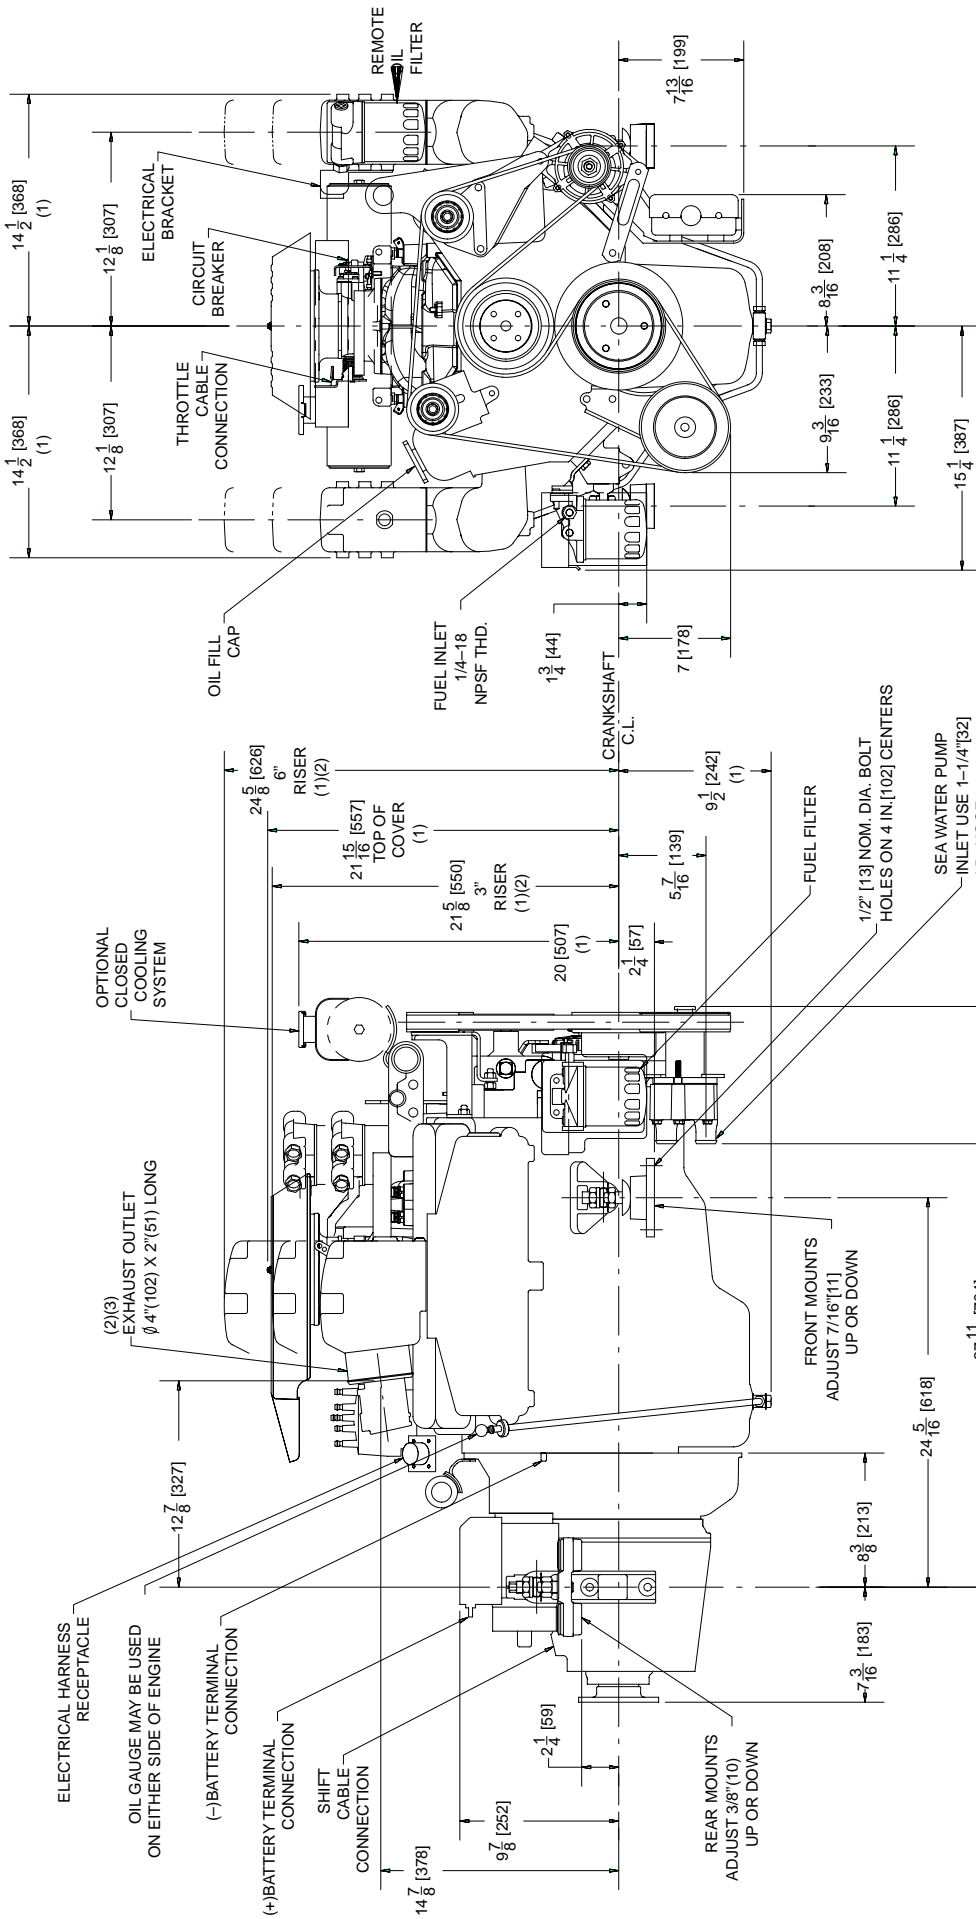

MIE 6.2L MPI WITH VELVET DRIVE 72C IN-LINE TRANSMISSION

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) SELECT THE APPROPRIATE EXHAUST RISE-HEIGHT TO MAINTAIN A MINIMUM OF 13 in. (330mm) BETWEEN THE TOP OF THE EXHAUST ELBOW AND THE WATERLINE OF THE BOAT AT MAXIMUM RATED LOAD.
- (3) EXHAUST OUTLETS MUST BE ABOVE WATERLINE OF BOAT AT MAXIMUM RATED LOAD.
- (4) NUMBERS INSIDE BRACKETS "[]" ARE IN MILLIMETERS.

| | |
|-----------------------------|--|
| UNIT OF MEASURE in. (mm) | SCALE APPROX. 1" = 1" 25.4mm = 304mm |
|-----------------------------|--|

