

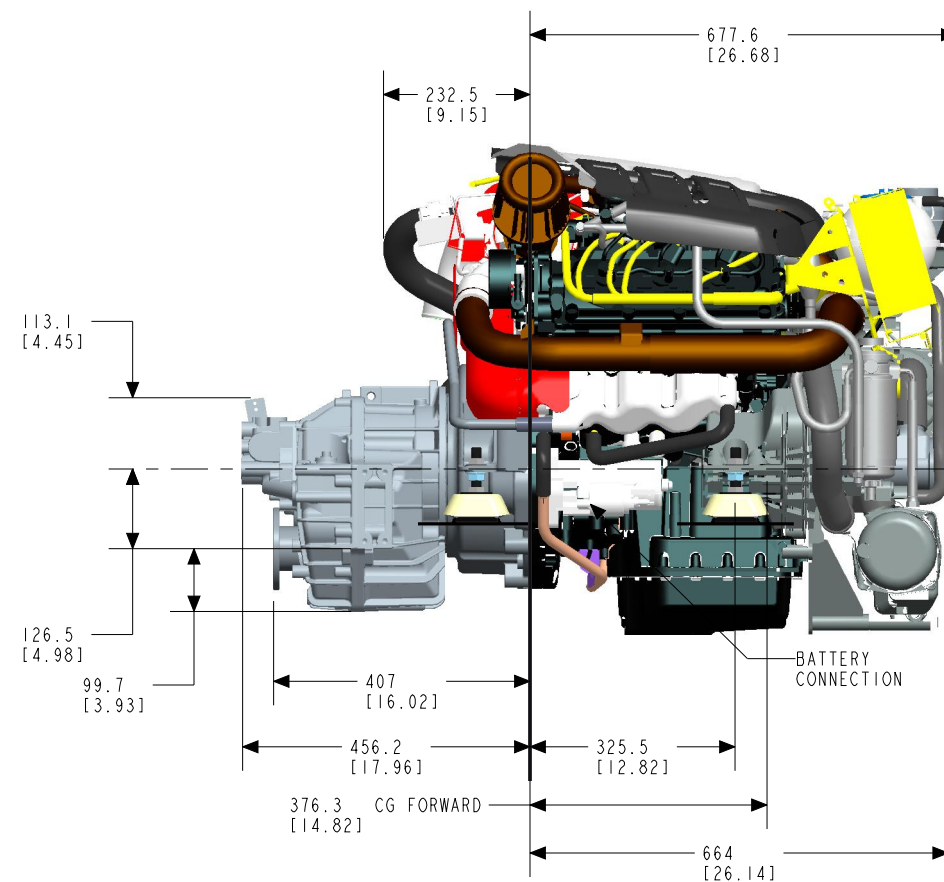


BACK OF BLOCK



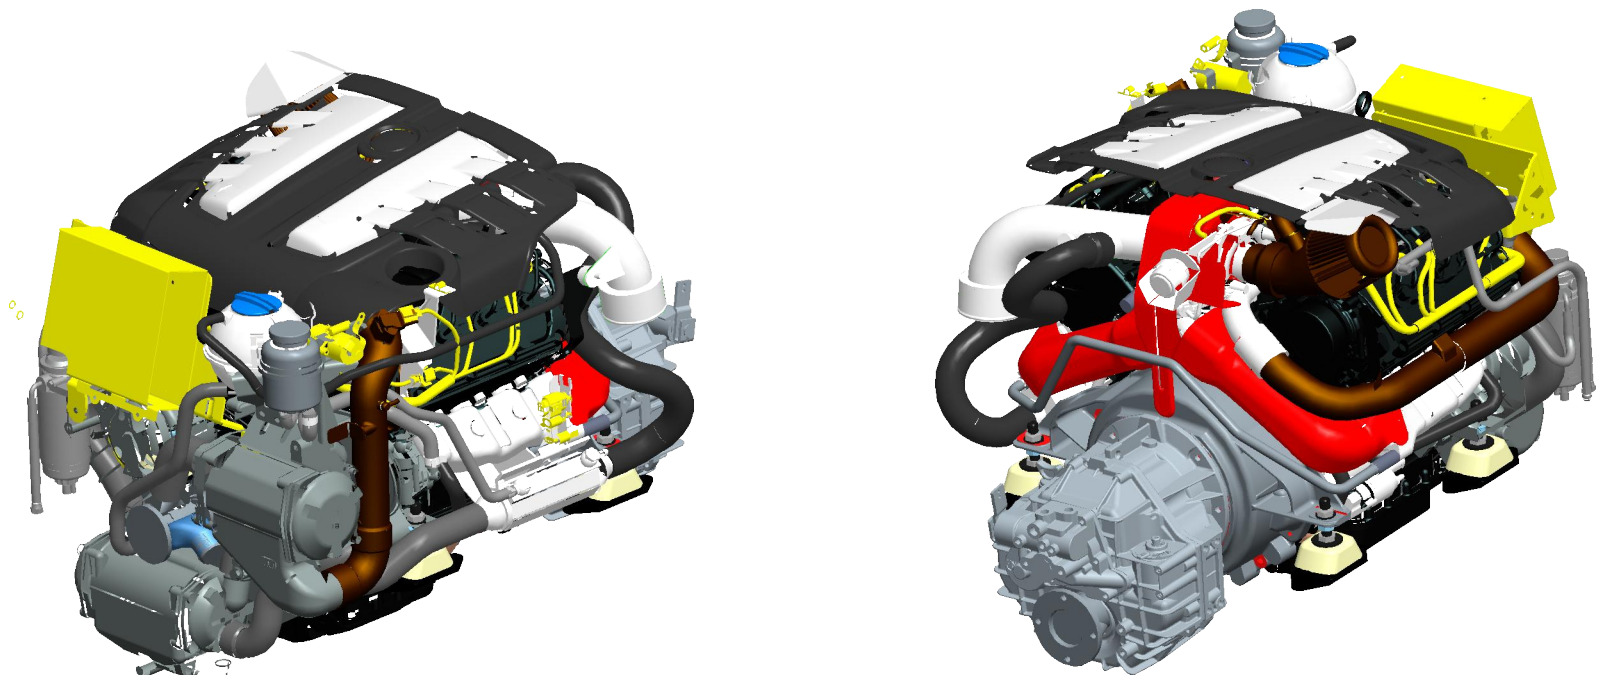


CRANKSHAFT
(3)

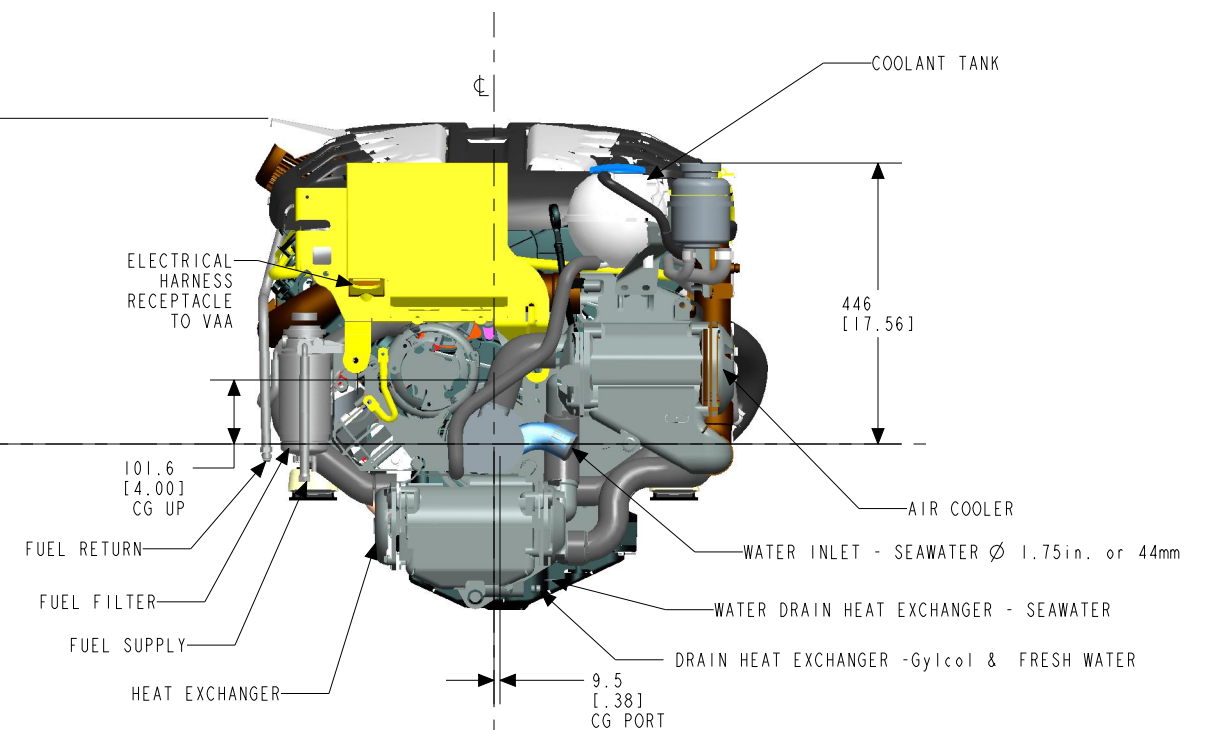


- NOTES:
- (1) REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.
 - (2) DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
 - (3) CENTER OF GRAVITY IS FOR ENGINE ONLY WITHOUT DRIVE OR TRANSMISSION.

TDI_P1_V6_63	REVISION	UNITS	SCALE	SHEETS	MERCURY
	A	mm (in)	1:12 25.4 mm = 305 mm 1" = 1'	1 OF 2	

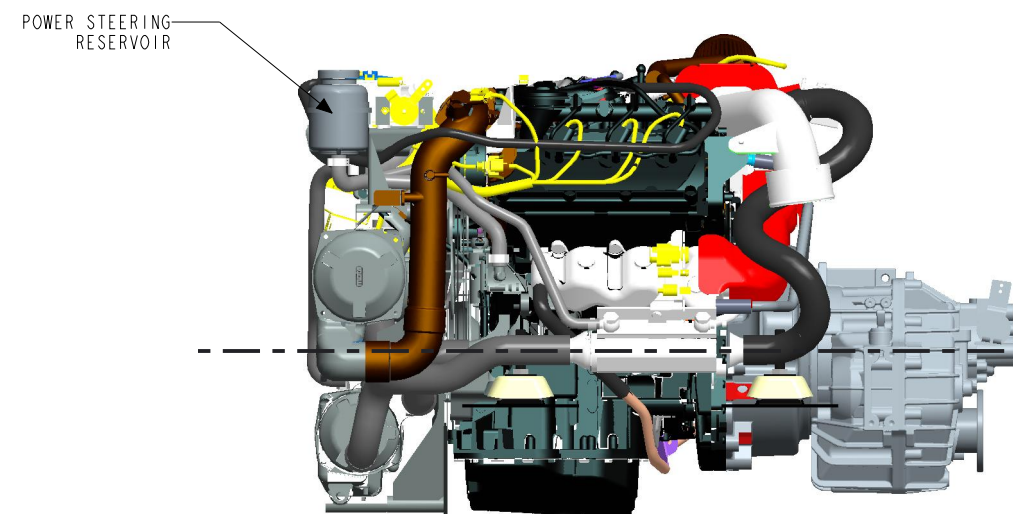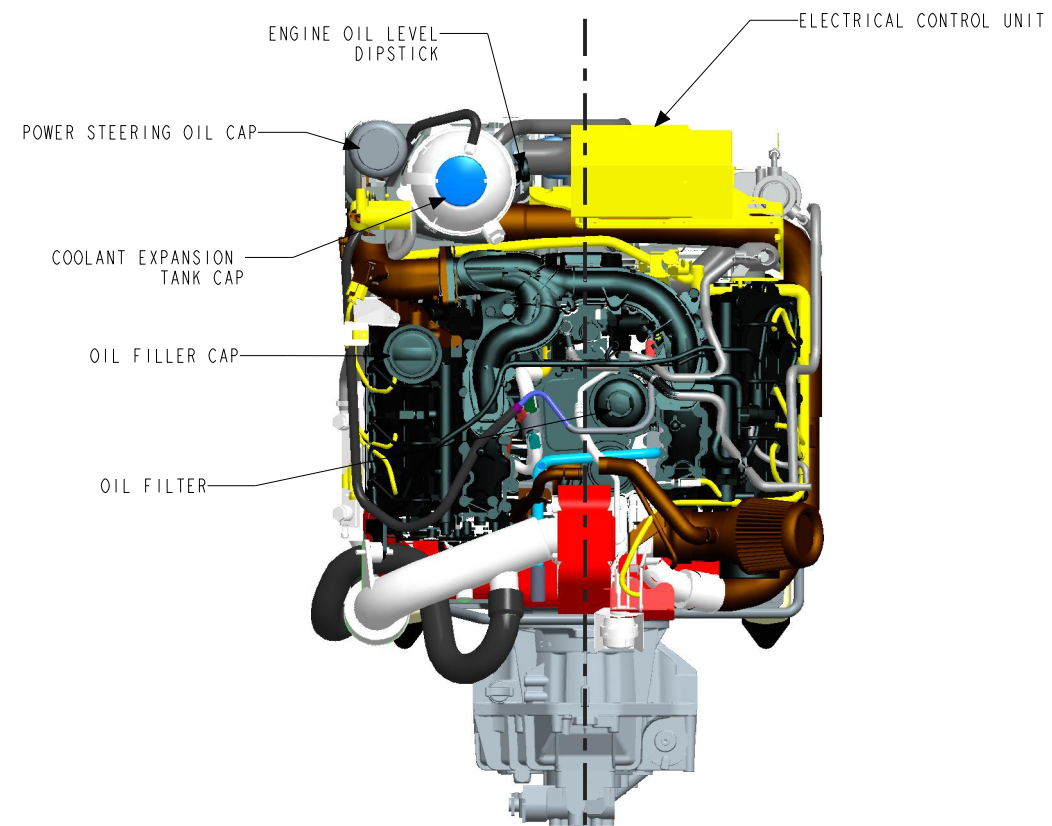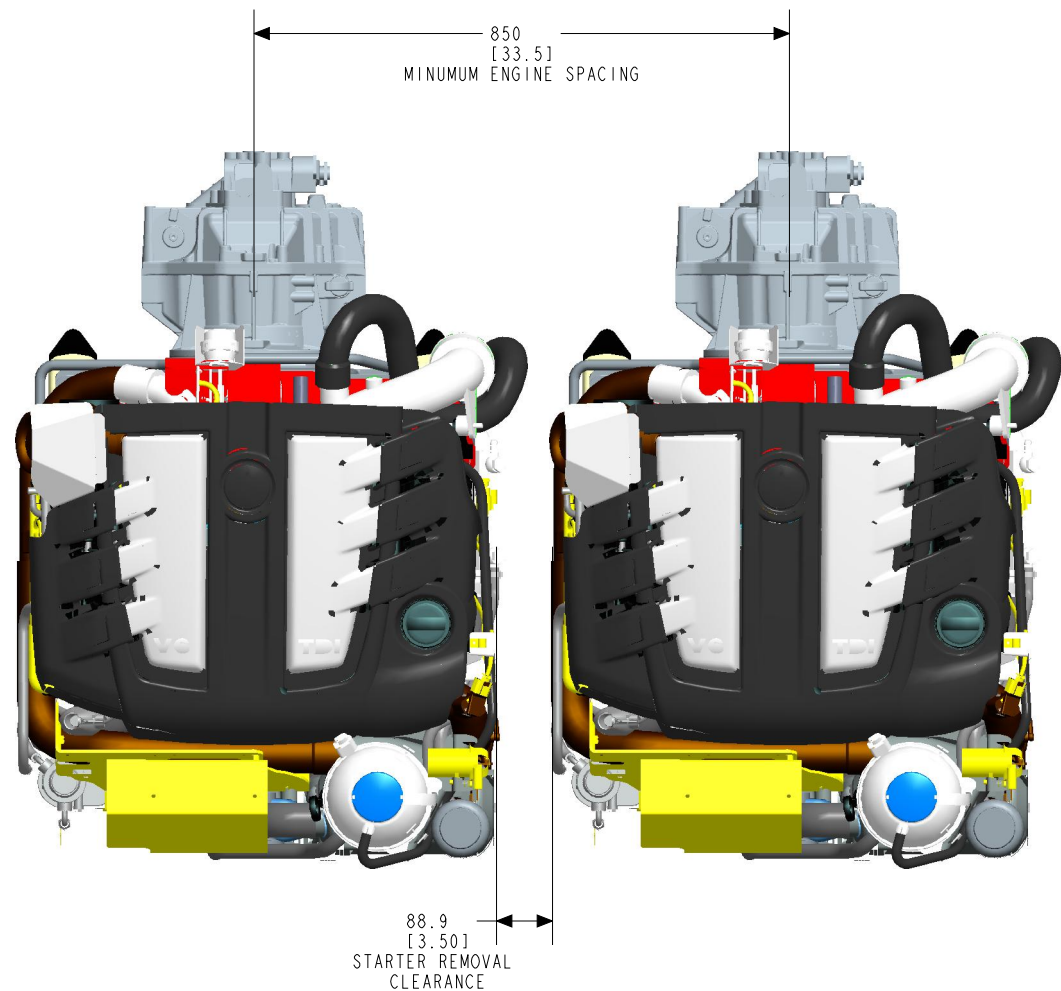

CRANKSHAFT
⌀

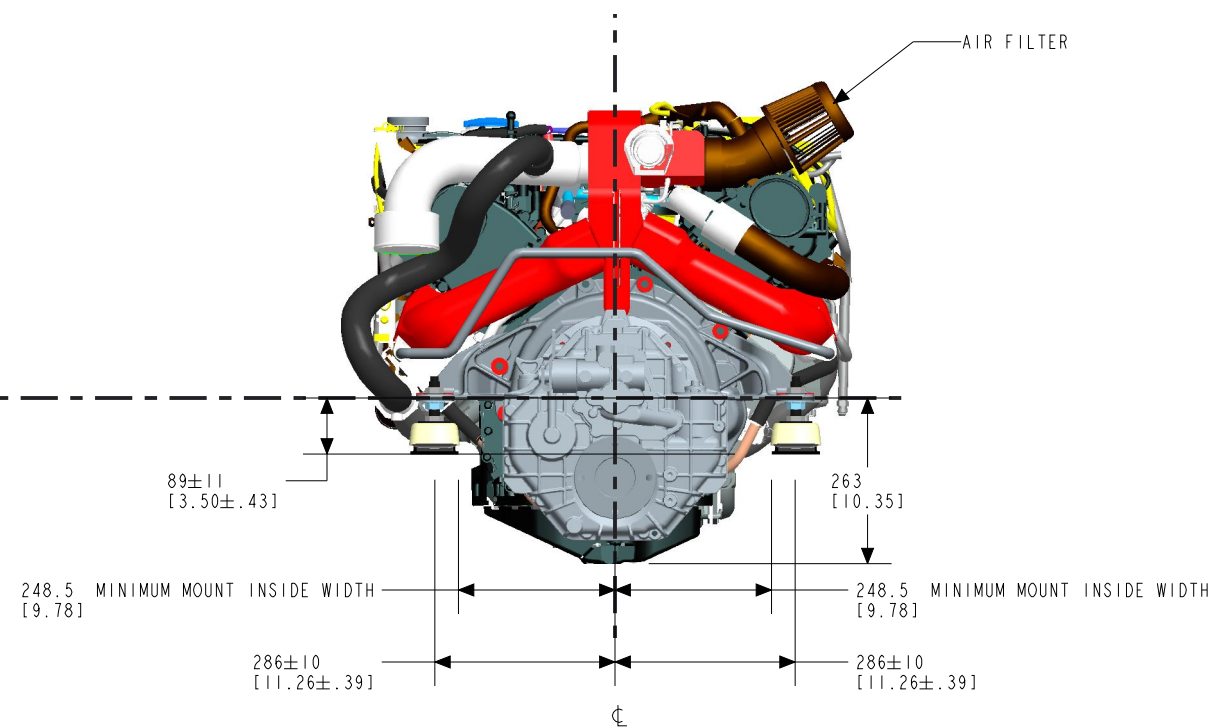

* VIEWS ARE WITH ENGINE COVER REMOVED

NOTES:
(1) REFER TO THE APPLICATION MANUAL FOR COMPLETE PRODUCT INSTALLATION REQUIREMENTS.
(2) DIMENSIONS REQUIRE A MINIMUM OF 1/2 in. (13 mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
(3) CENTER OF GRAVITY IS FOR ENGIN ONLY WITHOUT DRIVE OR TRANSMISSION.

TDI_P1_V6_63	REVISION A	UNITS mm (in)	SCALE 1:12 25.4 mm = 305 mm 1" = 1'	SHEETS 2 OF 2	MERCURY
--------------	---------------	---------------------	--	------------------	----------------