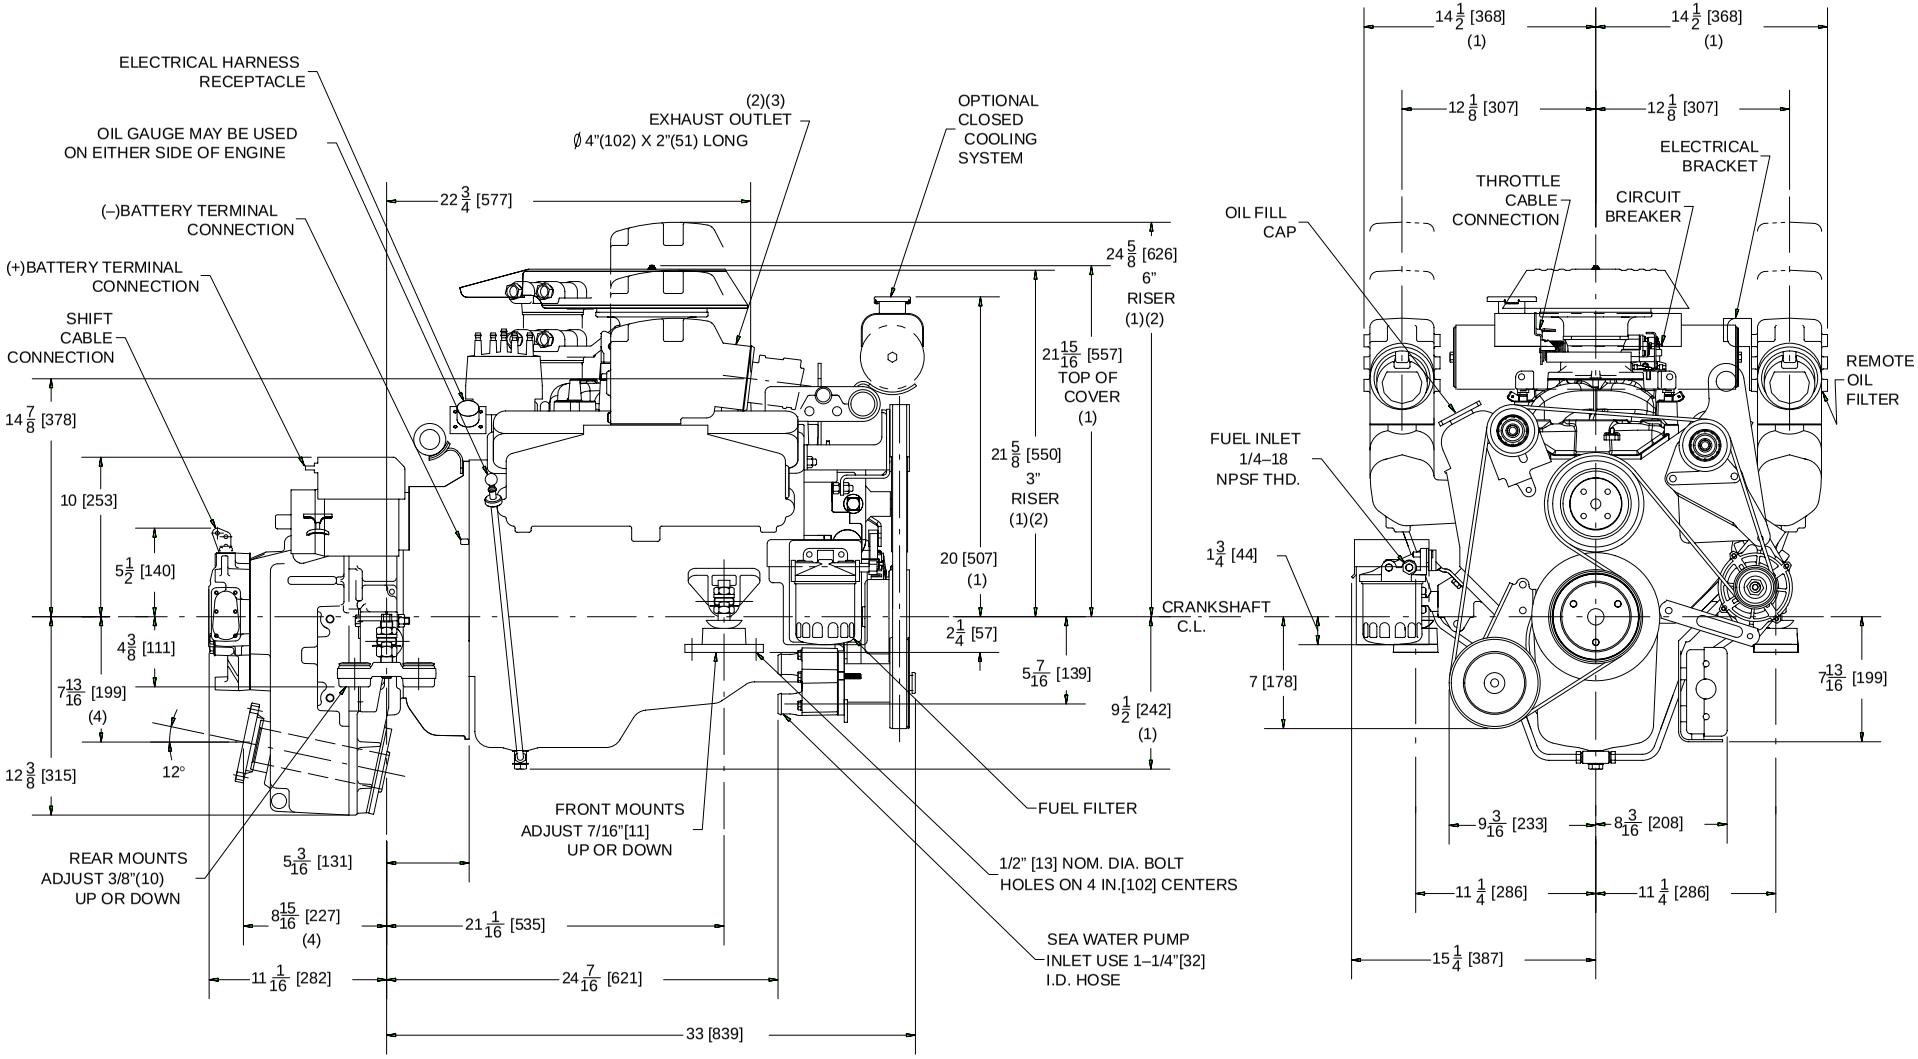



UNIT OF MEASURE in. (mm)	SCALE APROX. 1" = 1' 25.4mm = 304mm

MIE 6.2L MPI WITH VELVET DRIVE 5000V V–DRIVE TRANSMISSION

(1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
(2) SELECT THE APPROPRIATE EXHAUST RISE–HEIGHT TO MAINTAIN A MINIMUM OF 13 in. (330mm) BETWEEN THE TOP OF THE EXHAUST ELBOW AND THE WATERLINE OF THE BOAT AT MAXIMUM RATED LOAD.
(3) EXHAUST OUTLETS MUST BE ABOVE WATERLINE OF BOAT AT MAXIMUM RATED LOAD.
(4) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.
(5) NUMBERS INSIDE BRACKETS "[]" ARE IN MILLIMETERS.